


RANGE OF SALOON AND SPORTS CARS





## XJ6



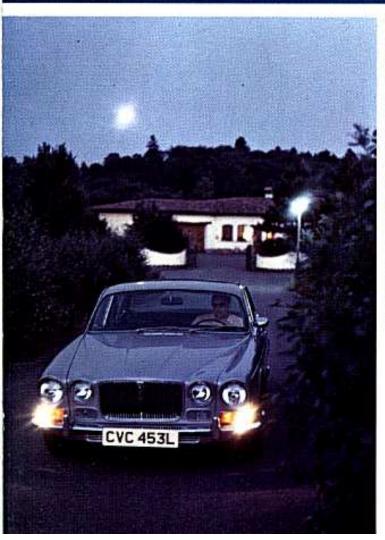



XJ12

ENGINE: In-line six-cylinder engine with twin overhead camshafts, twin carburetters and dual exhaust system. 2-8 litre model (2792 cc) develops 180 b.h.p. at 6,000 rev/min and 182 lbf ft torque at 3,750 rev/min. 4-2 litre model (4235 cc) develops 245 b.h.p. at 5,500 rev/min and 283 lbf ft torque at 3,750 rev/min.

TRANSMISSION: Manual change four-speed all-synchromesh, or manual with overdrive, or fully automatic transmission.

SUSPENSION: Independent on all four wheels. Anti-dive geometry on front.

WHEELS AND TYRES: Pressed steel bolt-on wheels. Low profile tyres with anti-aquaplaning tread.

BRAKES: All-disc. Servo-assisted hydraulic system. Independent circuits to front and rear.

STEERING: Rack and pinion with power assistance. Telescopically adjustable column.

FUEL SUPPLY: Twin tanks. Twin filler caps. Changeover switch on instrument panel.

INSTRUMENTS AND ELECTRICS: Comprehensive instrumentation and extensive electrical equipment in keeping with Jaguar custom.

BODY: Monocoque all-steel four-door saloon. Luxuriously upholstered. Fully trimmed boot.

HEATING AND VENTILATING: Comprehensive system of fresh air ventilation and heating with range of settings and individual volume controls to front and rear. 'Posivent' extraction.

PRINCIPAL DIMENSIONS: Overall length 15 ft 9 in. Overall width 5 ft 9·6 in. Overall height 4 ft 4·8 in. Wheelbase 9 ft 0·8 in. Track front 4 ft 10 in. Track rear 4 ft 10·6 in. Ground clearance 7 in.

JAGUAR XJ6L-THE 4.2 LITRE XJ6 IS ALSO AVAILABLE IN LONG WHEELBASE FORM-4" EXTRA LENGTH

ENGINE: 60-degree V12. Four carburetters. Single overhead camshafts per bank. 5343 cc 309 b.h.p. (gross) at 6,250 rev/min. 332 lbf ft torque (gross) at 4,000 rev/min. Transistorized ignition system.

TRANSMISSION: Automatic P-R-N-D-2-1 fitted as standard. 'T' lever control.

SUSPENSION: Independent on all wheels. Anti-dive geometry on front.

WHEELS AND TYRES: Ventilated, pressed steel wheels. Low profile tyres with steel 'breaker' and anti-aquaplaning tread pattern.

BRAKES: All-disc. Ventilated front discs. Servo-assisted and dual circuited. Pressure differential warning system. Line pressure proportioning system for rear brakes.

STEERING: Rack and pinion. Power assisted. Telescopic adjustment of column. FUEL SUPPLY: Twin tanks. Twin fillers. Changeover switch on instrument panel.


INSTRUMENTS AND ELECTRICS: Comprehensive equipment in keeping with Jaguar custom.

BODY: Monocoque all-steel, four-door saloon. Luxuriously upholstered. Fully trimmed boot.

HEATING AND VENTILATING: Comprehensive system of fresh air ventilation and heating. Wide range of settings and individual volume controls to front and rear. 'Posivent' extraction.


PRINCIPAL DIMENSIONS: Overall length 15 ft 9 in. Overall width 5 ft 9·6 in. Overall height 4 ft 4·8 in. Wheelbase 9 ft 0·8 in. Track front 4 ft 10 in. Track rear 4 ft 10·6 in. Ground clearance 7 in.



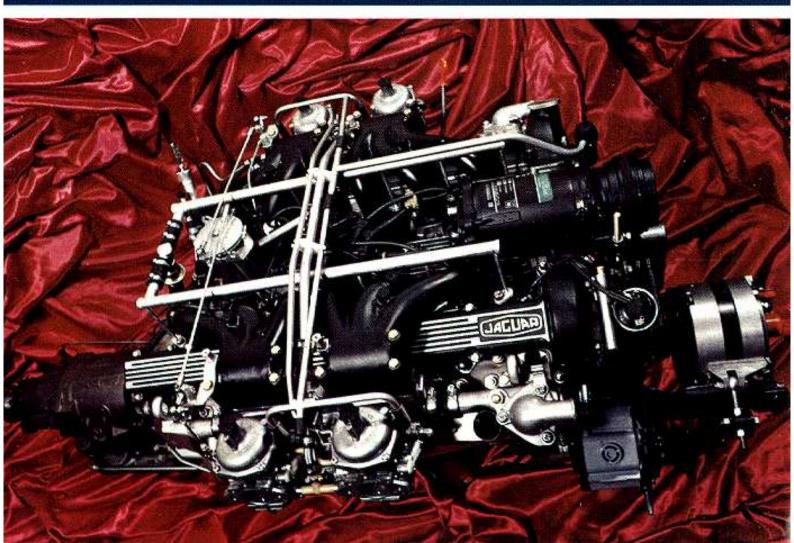





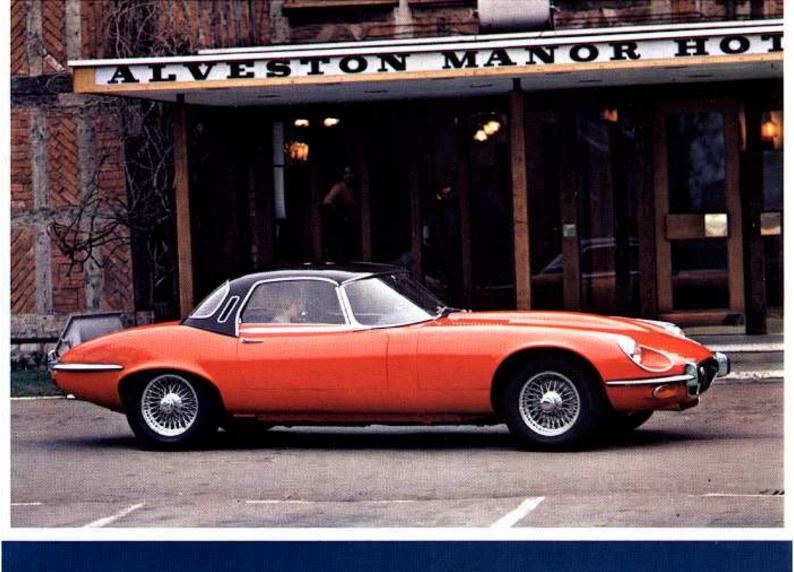

## SERIES THREE E-TYPE

Available as a 2+2 fixed head coupé or open two-seater roadster, the latter also offered with detachable hard top optional extra.

ENGINE: 60-degree V12. Four carburetters. Single overhead camshafts per bank. 5343 cc 314 b.h.p. (gross) at 6,200 rev/min. 349 lbf ft torque (gross) at 3,800 rev/min. Transistorized ignition.

TRANSMISSION: Four-speed all-synchromesh manual change or fully automatic with P-R-N-D-2-1 control.

SUSPENSION: Fully independent with antidive geometry at the front.

BRAKES: All-disc; servo-assisted; independent circuits to front and rear; ventilated front discs.

STEERING: Rack and pinion; power assisted; telescopically adjustable column.

WHEELS AND TYRES: Wide rim, pressed steel wheels. Low profile tyres, anti-aquaplaning tread.

FUEL SUPPLY: 18 gallon tank. Electric pump.

INSTRUMENTS AND ELECTRICS: Comprehensive equipment in keeping with Jaguar custom.

BODY: Monocoque main section. Bolt-on subframe for engine and front suspension. Choice of open two-seater (hard top optional extra) or 2+2 fixed head coupé.

HEATING AND DEMISTING: High capacity fresh air heating and demisting system. Through-flow ventilation on fixed head coupé and hard-top.

PRINCIPAL DIMENSIONS: Overall length 15 ft 4·5 in. Overall width 5 ft 6·1 in. Wheelbase 8 ft 9 in. Track front 4 ft 6·5 in. Track rear 4 ft 5 in.

Published by Jaguar Cars, British Leyland UK Limited, Coventry England